


Title:	Plates are not Put Correctly on Transfer Station	ID:	
		0318	
Date in:	Response:	Model:	Author:
2008-01-15	2008-01-15	-	CMa


Slide Station Horizontal Position Adjustment

Error: The plate is put to far out.

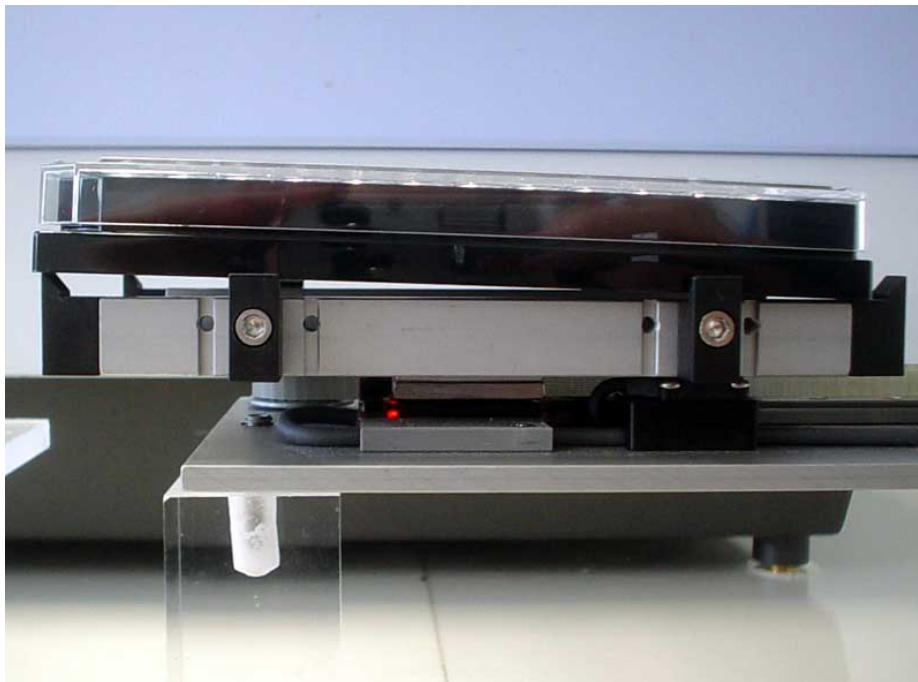

The inner position of the Slide Station is to close to the back plane or the Gate. Most likely the machine was pushed inwards.

The upper part of the Transfer Station can be moved horizontally after loosening the two screws underneath the holder bracket.

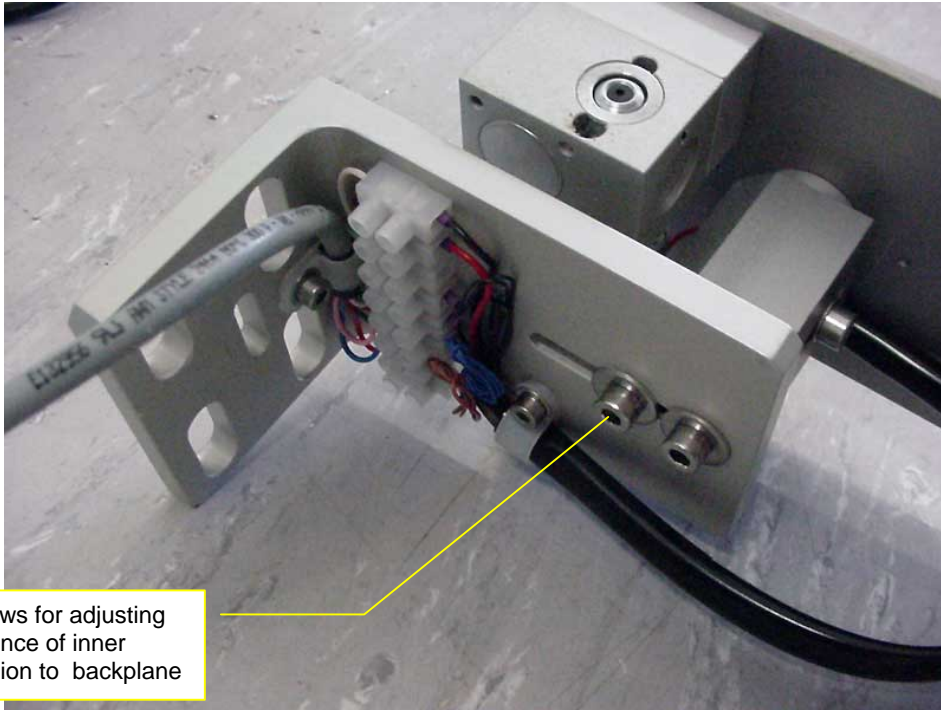

CMa, 15.01.08